### **Product sheet**

# Miniature connector



Product

Contacts: 2, Cable plug connector with shielding ring, shieldable, cable outlet 6 - 8 mm, with UL approval


Article number


Area

M16 IP67 Series 423 99 5601 19 02


Pole

Illustration





### **Attenuation characteristic**



You can find the item description and assembly instruction on the next page.

# **Technical data**

#### **Common values**

Connector Design Connector locking system Termination Wire gauge (mm) Wire gauge (AWG) Cable outlet Upper temperature Lower temperature

Cable plug connector screw Solder 0.75 mm<sup>2</sup> 20 6 - 7.8 mm 95 °C -40 °C

## **Electrical values**

Rated voltage 250 V Rated impulse voltage 1500 V Pollution degree Overvoltage category Material group Ш Rated current (40°C) 7 A Volume resistivity  $\leq$  3 m $\Omega$ EMV compliance shielded Degree of protection Mechanical operation > 500 mating cycles

#### Material

Material of contact CuZn (Brass) Contact plating Au (Gold) Material of contact body PBT (UL 94 V-0) Material of housing CuZn (Brass nickel-plated)

Contacts: 2, Cable plug connector with shielding ring, shieldable, cable outlet 6 - 8 mm, gold plated contacts, with UL approval

### **Product sheet**

# Miniature connector




Product Contacts: 2, Cable plug connector with shielding ring, shieldable, cable outlet 6 - 8

mm, with UL approval

Area Article number M16 IP67 Series 423 99 5601 19 02

Pole

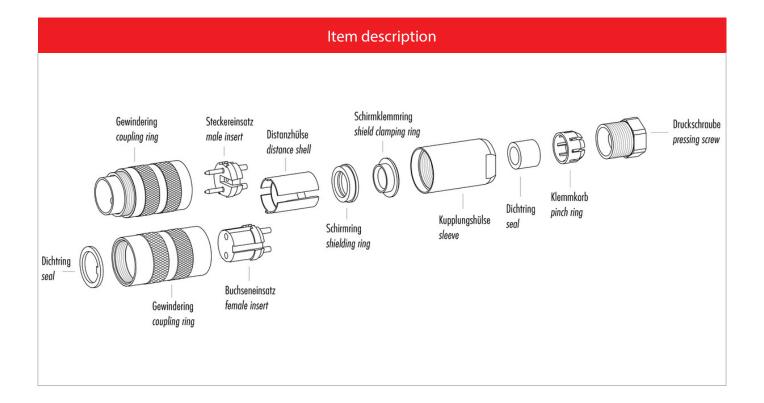

# Installation instructions / Mounting cutout

### **Gerade Version**

(Ausführung mit Schirmklemmring)

- 1. Druckschraube, Klemmkorb, Dichtung, Distanzhülse und ersten Schirmklemmring auffädeln.
- 2. Litzen abisolieren, Schirm aufweiten und zweiten Schirmklemmring auffädeln.
- 3. Litzen anlöten, Distanzhülse montieren, die beiden Klemmringe mit dem Schirm zusammenschieben und überstehenden Schirm abschneiden.
- 4. Übrige Teile gemäß Darstellung montieren.

## Straight version

(Version with shield clamping ring)

- 1. Bead pressing screw, pinch ring, seal, distance shell and first shield clamping ring on cable.
- 2. Strip wires, widen shield and bead second shield clamping ring.
- 3. Solder wires, snap distance shell, push the two shield clamping rings together and cutt off projecting shielding braid.
- 4. Assemble remaining parts according to picture.

