#### **Product sheet**

### Miniature connector



Product Contacts: 6 DIN, Female cable connector,

short version, cable outlet 4 - 8 mm, with


UL approval


Pole 6 DIN

Area Article number 9

M16 IP67 Series 423 99 5122 40 06







You can find the item description and assembly instruction on the next page.

# **Technical data**

#### **Common values**

Connector Design
Connector locking system
Termination
Wire gauge (mm)
Wire gauge (AWG)
Cable outlet
Upper temperature
Lower temperature

Female cable connector screw Solder 0.75 mm<sup>2</sup> 20 4 - 8 mm 95 °C -40 °C

#### **Electrical values**

Rated voltage 250 V Rated impulse voltage 1500 V Pollution degree Overvoltage category Material group Ш Rated current (40°C) 5 A Volume resistivity  $\leq$  3 m $\Omega$ EMV compliance not shielded Degree of protection IP67 Mechanical operation > 500 mating cycles

### Material

Material of contactCuSn (Bronze)Contact platingAu (Gold)Material of contact bodyPBT (UL 94 V-0)Material of housingCuZn (Brass nickel-plated)

Contacts: 6 DIN, Female cable connector, short version, cable outlet 4 - 8 mm, gold plated contacts, with UL approval

#### **Product sheet**

### Miniature connector




Product Contacts: 6 DIN, Female cable connector,

short version, cable outlet 4 - 8 mm, with

UL approval

Pole 6 DIN

Area **M16 IP67 Series 423** Article number **99 5122 40 06** 

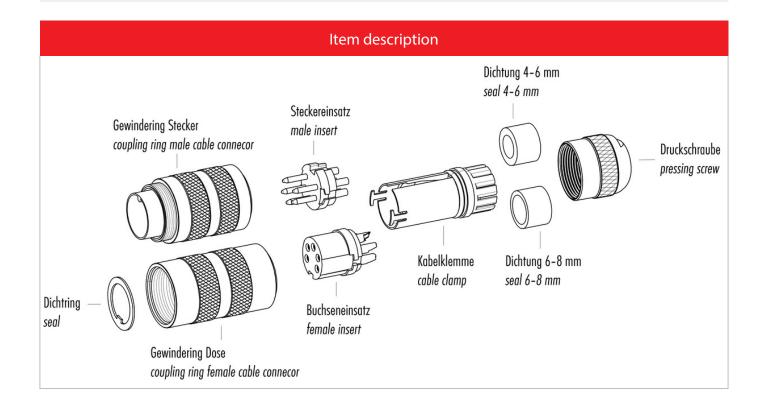

## Installation instructions / Mounting cutout

#### **Gerade Version**

(Ausführung mit Schirmklemmring)

- Druckschraube, Klemmkorb, Dichtung, Distanzhülse und ersten Schirmklemmring auffädeln.
- 2. Litzen abisolieren, Schirm aufweiten und zweiten Schirmklemmring auffädeln.
- Litzen anlöten, Distanzhülse montieren, die beiden Klemmringe mit dem Schirm zusammenschieben und überstehenden Schirm abschneiden.
- 4. Übrige Teile gemäß Darstellung montieren.

### Straight version

(Version with shield clamping ring)

- 1. Bead pressing screw, pinch ring, seal, distance shell and first shield clamping ring on cable.
- 2. Strip wires, widen shield and bead second shield clamping ring.
- Solder wires, snap distance shell, push the two shield clamping rings together and cutt off projecting shielding braid.
- 4. Assemble remaining parts according to picture.

