


Product **Female panel mount connector SMT, shieldable**

Area **M12-D, M12-X Series 825/876 D-coding**  
 Article number **09 0732 601 04**

**Illustration**



**Scale drawing**

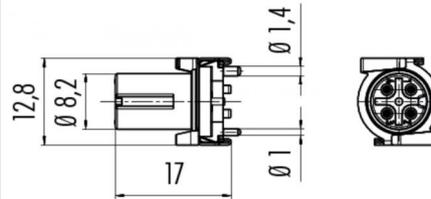

**Technical data**

**General features**

Connector Design	female panel mount connector
Termination	SMT
Upper temperature	-40 °C
Lower temperature	85 °C

**Electrical parameters**

Rated voltage	250 V
Rated impulse voltage	2500 V
Rated current (40°C)	4A
EMV compliance	shieldable
Degree of protection	IP67
Mechanical operation	> 100 Mating cycles

**Material**

Material of contact	CuZn(Messing)
Contact plating	Au (gold)
Material of contact body	LCP