

Product sheet

Subminiature connector




Product	Contacts 8, female panel mount connector IP 67, front screw connection	Area	Push-Pull IP67 Series 430
Pole	8	Article number	09 4932 080 08

Illustration



Scale drawing

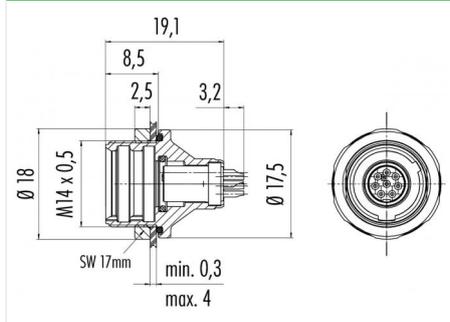

Contact Arrangement

	X	Y
1	-0,90	-1,65
2	-1,85	-0,35
3	-1,45	1,20
4	0,00	1,85
5	1,45	1,20
6	1,85	-0,35
7	0,90	-1,65
8	0,00	0,00

You can find the assembly instruction on the next page.

Technical data

Common values

Connector Design	Female panel mount connector
Connector locking system	Push-Pull
Termination	Solder
Wire gauge (mm)	0.14 mm ²
Wire gauge (AWG)	26
Cable outlet	-
Upper temperature	85 °C
Lower temperature	-40 °C

Electrical values

Rated voltage	125 V
Rated impulse voltage	1500 V
Pollution degree	2
Overvoltage category	I
Material group	II
Rated current (40°C)	1 A
Volume resistivity	≤ 5 mΩ
EMV compliance	not shieldable
Degree of protection	IP67
Mechanical operation	> 500 mating cycles

Cable data

material housing	-
Insulation single lead	-
Single lead structure	-
Conductor resistance	-

Material

Material of contact	CuSn (Bronze)
Contact plating	Au (Gold)
Material of contact body	PBT, PA
Material of housing	CuZn (Brass nickel-plated)

Contacts: 8, female panel mount connector IP 67, front screw-connection

Product

Contacts 8, female panel mount connector
IP 67, front screw connection
8

Area
Article number

Push-Pull IP67 Series 430
09 4932 080 08

Pole

Installation instructions / Mounting cutout

