


Product	Contacts: 8, Male panel mount connector, lightgrey, solder termination
Area	Snap-in IP67, miniature Series
Article number	99 9127 400 08


Illustration



Scale drawing

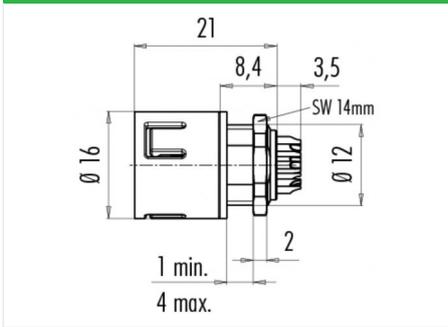

Contact Arrangement

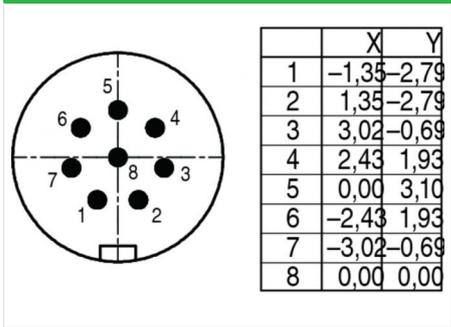

You can find the item description and assembly instruction on the next page.

Technical data

General features

Connector Design	male panel mount connector
Connector locking system	snap
Termination	solder
Wire gauge (mm)	0,25 mm ²
Wire gauge (AWG)	24
Upper temperature	85 °C
Lower temperature	-40 °C

Electrical parameters


Rated voltage	125 V
Rated impulse voltage	1500 V
Pollution degree	2
Overvoltage category	II
Material group	II
Rated current (40°C)	2 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP67

Material

Material of contact	CuSn (Bronze)
Contact plating	Au (gold)
Material of contact body	PA (UL 94 V-0)

Product **Contacts: 8, Male panel mount connector, lightgrey, solder termination**
Area **Snap-in IP67, miniature Series**
Article number **99 9127 400 08**

Item description

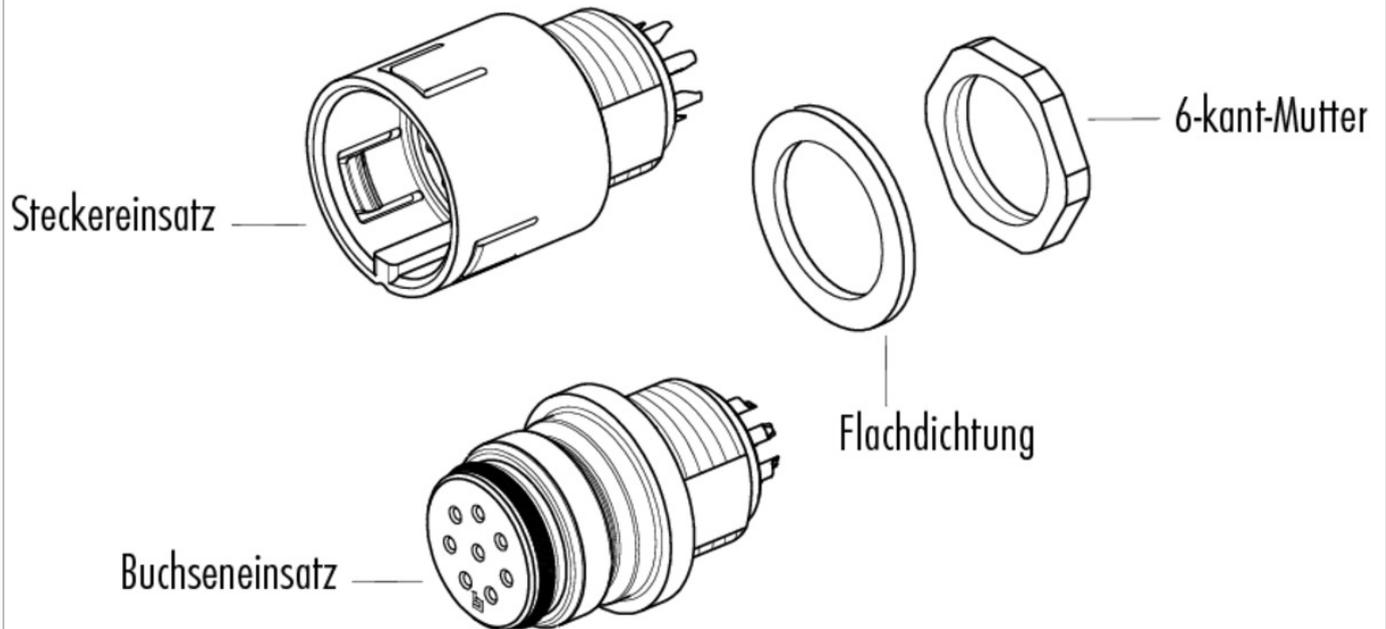

Installation instructions / Mounting cutout

